

NOTES:

1. BURY BOTTOM OF FILTER FABRIC 6" VERTICALLY BELOW FINISHED GRADE.
2. 2"x 2" WOOD OR STEEL FENCE POSTS.
3. POSTS TO BE INSTALLED PER MANUFACTURERS SPECIFICATIONS
4. COMPACT BOTH SIDES OF FILTER FABRIC TRENCH.
5. PANELS MUST BE PLACED ACCORDING TO SPACING IN TABLE BELOW

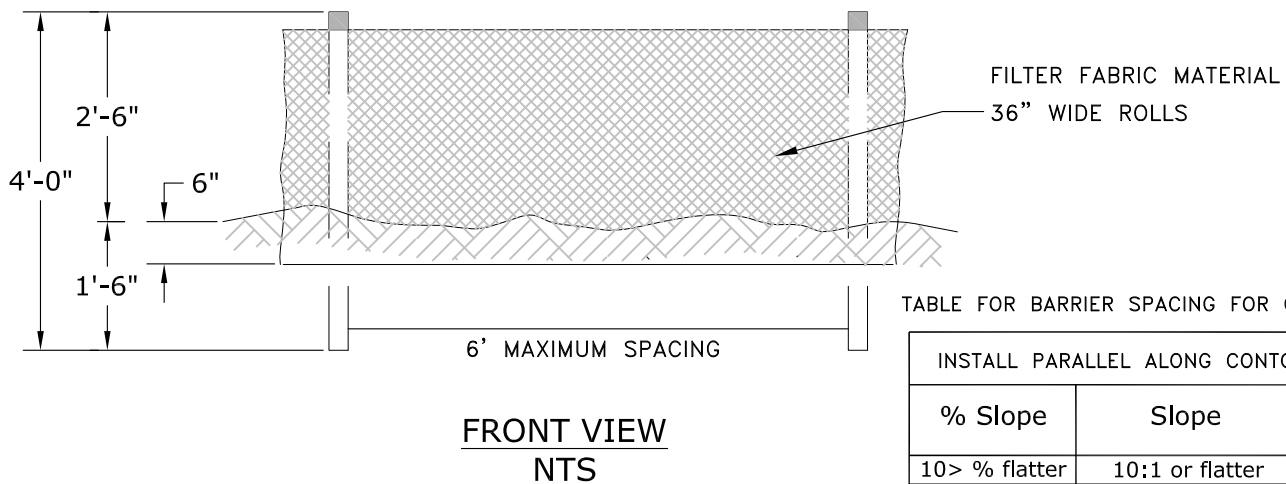


TABLE FOR BARRIER SPACING FOR GENERAL APPLICATION

INSTALL PARALLEL ALONG CONTOURS AS FOLLOWS		
% Slope	Slope	Max. spacing on slope
10 > % flatter	10:1 or flatter	300 ft.
10 > % < 15	10:1 > X < 7.5:1	150 ft.
15 > % < 20	7.5:1 > X < 5:1	100 ft.
20 > % < 30	5:1 > X < 3.5:1	50 ft.
30 > % < 50	3.5:1 > X < 2:1	25 ft.



City of Lake Oswego
Engineering Division

Erica Rooney, P.E. City Engineer

SEDIMENT FENCE

E1-03

EFFECTIVE DATE: JANUARY 1, 2018

NOT TO SCALE

DRAWING NUMBER