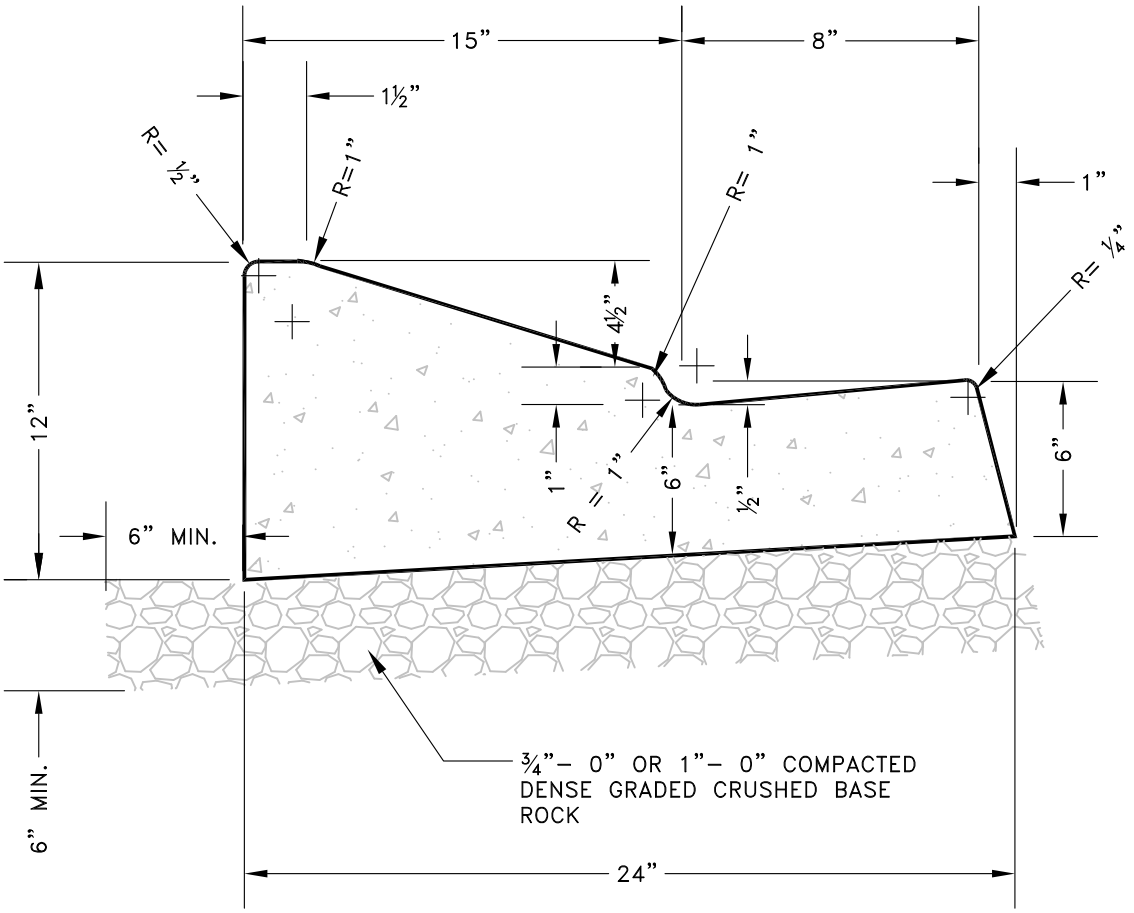

NOTES:

1. CONCRETE USED FOR CURB SHALL MEET A 3,000 PSI COMPRESSION STRENGTH AT 28 DAYS.
2. CONTRACTION JOINTS (1½”DEEP) SHALL BE CONSTRUCTED AT ALL CHANGES OF DIRECTION, POINTS OF CURVATURE AND AT A MAXIMUM SPACING OF 10 FEET.
3. THIS CURB DESIGN IS LIMITED TO USE IN SPECIAL CIRCUMSTANCES SPECIFICALLY APPROVED BY THE CITY ENGINEER.
4. FINISH ENTIRE CONCRETE SURFACE TO SMOOTH AND UNIFORM TEXTURE WITH A BROOM FINISH, UNLESS OTHERWISE DIRECTED.

City of Lake Oswego
Engineering Division
Erica Rooney, P.E. City Engineer

MOUNTABLE CURB DETAIL

S2-03A

EFFECTIVE DATE: JANUARY 1, 2018 NOT TO SCALE DRAWING NUMBER