


**TYPE III BARRICADE**

**NOTES:**

1. MARKINGS FOR BARRICADE RAILS SHALL BE ALTERNATE WHITE AND RED STRIPES (SLOPING DOWNWARD AT AN ANGLE OF 45°).
2. BARRICADE SECTION SHALL EXTEND ACROSS THE ENTIRE STREET AREA. USE DOUBLE BARRICADES AS NECESSARY SEPARATED BY 4".
3. WHEN BARRICADE USED AT THE END OF A SIDEWALK, INSTALL 2" X 4" TAP BOARD. TAP BOARD SHALL PAINTED WHITE, INSTALLED 1" ABOVE SIDEWALK SURFACE AND OVERLAP SIDEWALK. NO SIGN REQUIRED ON BARRICADE.
4. SEE SECTION 2B-67 OF THE MUTCD FOR USES AND REFLECTIVITY REQUIREMENTS.
5. OPTION TO USE ALTERNATIVE POST AND PLANK MATERIALS SUBJECT TO APPROVAL OF CITY ENGINEER.

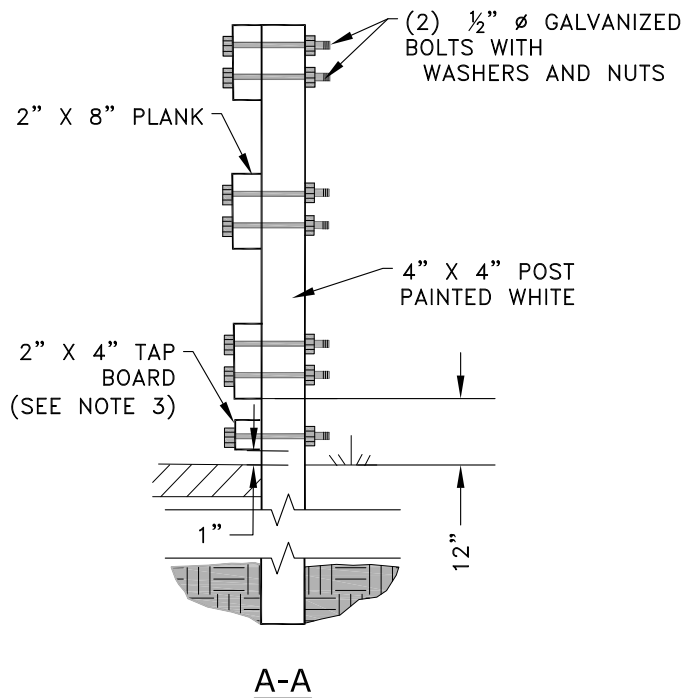

City of Lake Oswego  
Engineering Division  
Erica Rooney, P.E. City Engineer

**PERMANENT CLOSURE  
BARRICADE**

**S5-03**

EFFECTIVE DATE: JANUARY 1, 2018

NOT TO SCALE

DRAWING NUMBER